



The switch has labels on it. Terminal numbers can be seen from the sides.

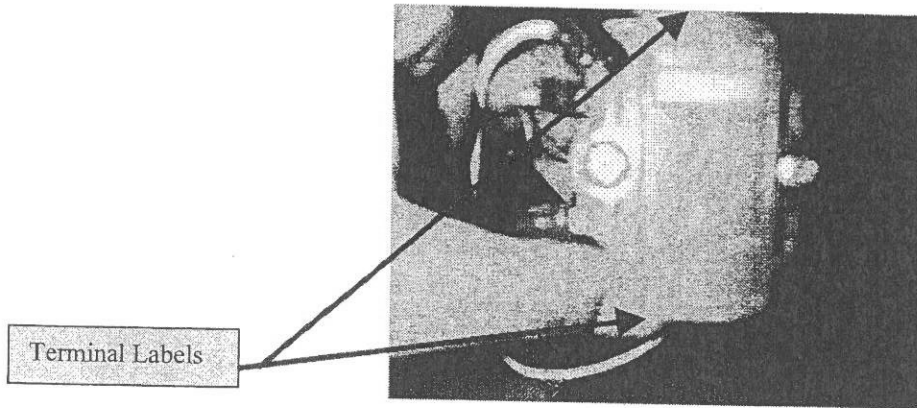

9. From the switch a black wire coming from **terminal 4** should be attached to the fuse holder.
10. Two black wires should be coming out from the fuse holder. One is going to the pilot lamp and the other one to the filter of the controller. (Filter is located underneath the controller).
11. **Terminal 2** from the switch should have two white wires coming out, one going to the filter and the other going to the pilot lamp.
12. Please check the wires again, refer to the diagram.

After the wires are checked, you are now ready to plug in your Shimpo Whee

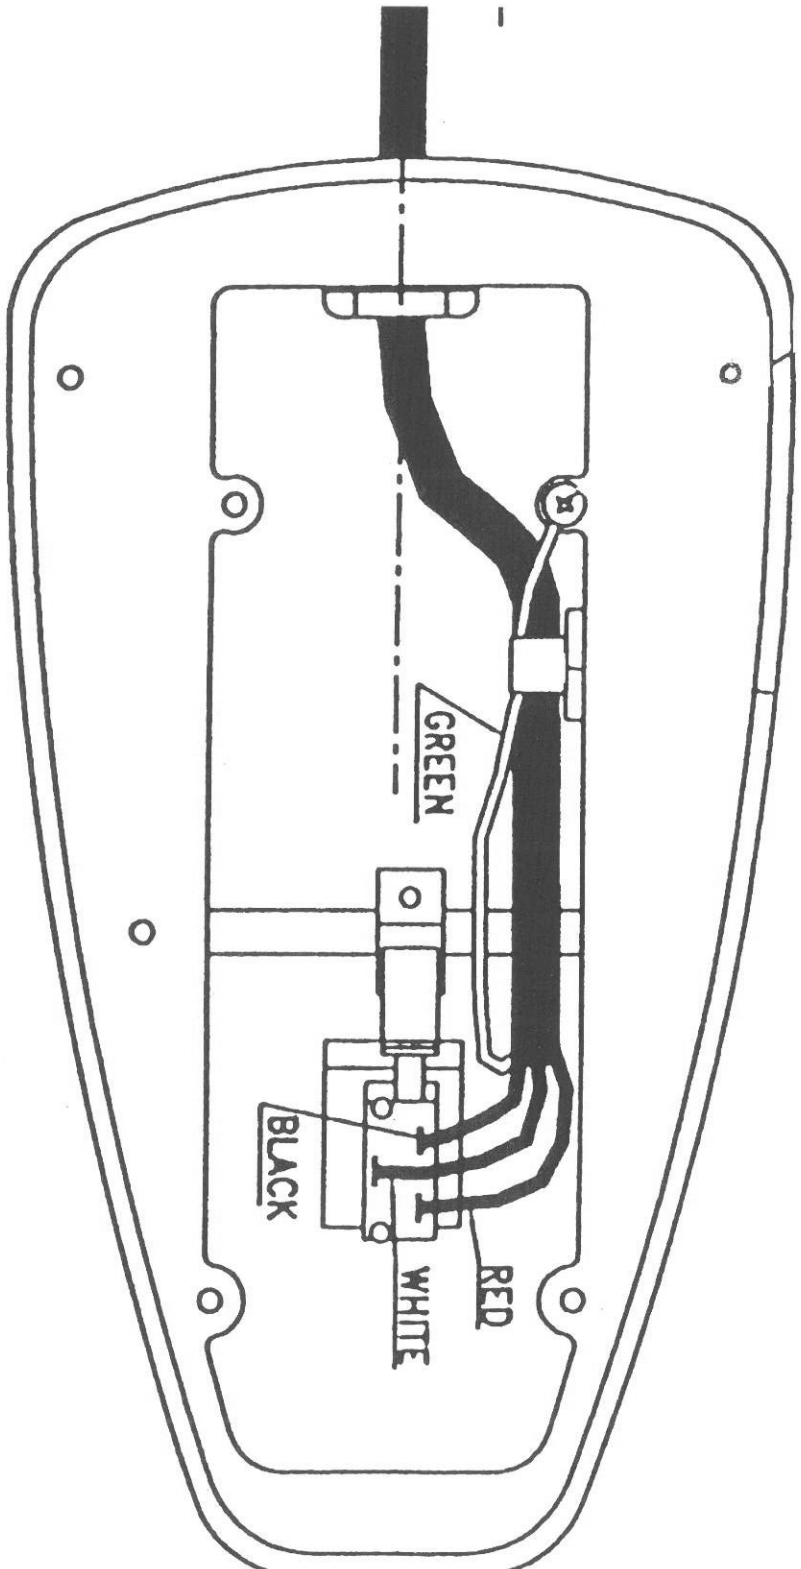

MASTERS & VELOCITY